

CP Junction Boxes - with plastic screw



Surface-mounting watertight junction boxes in compliance with EN 60670-1 (CEI 23-48) and IEC 60670-22 (CEI 23-94) and made in high-performance technopolymers.




IP rated as "dust tight" and protected against water immersion.

Insulation class	II (according to IEC 61140 standards)	Colour	Grey RAL 7035
IP degree	IP67	Material	Technopolymer GWPLAST 75
Mechanical resistance	IK08	Internal dim. LxHxD (mm)	310x230x130
Max Ø holes possible	48 mm	Lid screws (no. and type)	4 insul. sealable hinged
Application	Ordinary junctions	Glow Wire Test	650 °C
Lid	Plain screwed	Operating temperature	-25 +60 °C
Type of material	Halogen-free in compliance with EN 60754-2	Electrocod	02211
Thermo-pressure with ball	85 °C	Torque screws tightening	1.8 Newton/meter

DIMENSIONS

310 mm xmm 230 mm x 130

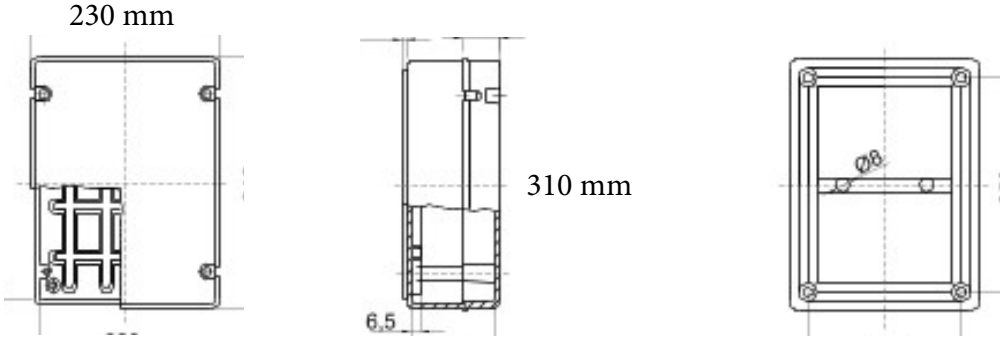

TECHNICAL SYMBOLOGY

	IP	IK	GWT			
II (according to IEC 61140 standards)	IP56	IK08	650 °C	-25 +60 °C	Halogen-free in compliance with EN 60754-2	85 °C

STANDARDS

