

CP Junction Boxes - with Steel screws



Surface-mounting watertight junction boxes in compliance with EN 60670-1 (CEI 23-48) and IEC 60670-22 (CEI 23-94) and made in high-performance technopolymers.


IP54

This rating indicates that an electrical enclosure is protected from limited dust ingress and water spray from any direction.

Insulation class	II (according to IEC 61140 standards)	Colour	Grey RAL 7035
IP degree	IP54	Material	Technopolymer GWPLAST 75
Mechanical resistance	IK08	Internal dim. LxHxD (mm)	150x110x70
Max Ø holes possible	29 mm	Lid screws (no. and type)	4 stainless steel screws
Application	Ordinary junctions	Glow Wire Test	650 °C
Lid	Plain screwed	Operating temperature	-25 +60 °C
Type of material	Halogen-free in compliance with EN 60754-2	Electrocod	02211
Thermo-pressure with ball	85 °C	Torque screws tightening	1.8 Newton/meter

DIMENSIONS

150 mm x 110mm x 70

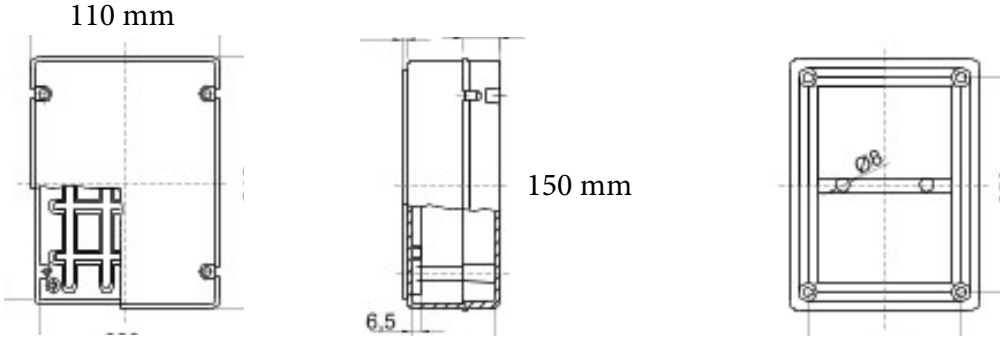

TECHNICAL SYMBOLOGY

	IP	IK	GWT			
II (according to IEC 61140 standards)	IP56	IK08	650 °C	-25 +60 °C	Halogen-free in compliance with EN 60754-2	85 °C

STANDARDS

